

Stura

Patterned Anti-Slip Heat Shrink Tubing
花纹防滑热缩管

舒适防滑, 提升手感, 美观装饰
Comfort Grip, Anti-Slip, Enhanced Appearance

花纹防滑热缩管广泛应用于高档钓具、体育器材、健身器材、各类手扶工具及厨房用具手柄的防滑装饰。其独特的防滑花纹设计，不仅提升了握持的舒适性和安全性，还能有效增强产品的美观度，为各类日常及专业工具提供优越的手感体验和实用性。

Patterned anti-slip heat shrink tubing is widely used in premium fishing gear, sports equipment, fitness equipment, various handheld tools, and kitchen utensil handles for anti-slip decoration. Its unique textured surface significantly improves grip comfort and safety while enhancing the overall appearance of products, offering superior tactile experience and functionality for both everyday and professional applications.




产品特性与优势 Features and benefits

性能 Property	指标要求 Requirement	测试方法 Test Method	典型值 Typical Data
操作温度范围 Operating Temperature	/	/	-55°C to +110°C
最低收缩温度 Min. Shrink Temperature	/	/	+60°C
完全收缩温度 Full recovery temperature	/	/	+105 °C
长度变化率 Longitudinal change	-8% ~ +8%	ASTM D 2671	-8% ~ +8%
抗张强度 Tensile strength	≥10.4 MPa	ASTM D 2671	≥10.4 MPa
断裂伸长率 Elongation at break	≥200%	ASTM D 2671	≥200%

- 收缩比2:1
- 独特花纹防滑设计，提升握感安全
- 柔软、收缩快，适用-55℃~+110℃
- 多色可选，适合多种手柄防滑装饰
- Shrink ratio 2:1
- Unique patterned anti-slip design for better grip and safety
- Soft, fast shrinking, usable from -55°C to +110°C
- Multiple colors, ideal for various handle decoration

颜色 COLOR

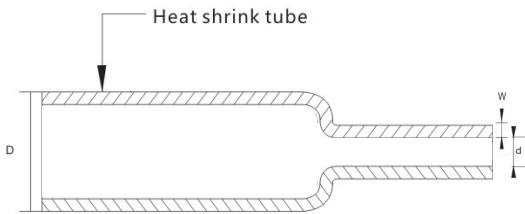

- 符合标准 Standards
- RoHS;
 - REACH

标准壁厚 Standard wall thickness							
收缩比 Shrink Ratio	编号 Part No.	规格 Size (Φ mm)	收缩前 As supplied (mm)		收缩后 After recovered (mm)		标准长度 Standard length (m/pc)
			内径 I.D (D)	壁厚 W.T (w)	最大内径 I.D.max (d)	壁厚 W.T (w)	
2:1	Stura-P-15	15	≥15	0.45±0.15	≤8.0	0.85±0.15	1.0
	Stura-P-20	20	≥20	0.50±0.15	≤11.0	0.90±0.15	0.8/1.0/1.6
	Stura-P-22	22	≥22	0.50±0.15	≤12.5	0.90±0.15	0.8/1.0/1.6
	Stura-P-25	25	≥25	0.50±0.15	≤14.5	1.00±0.15	0.8/1.0/1.6
	Stura-P-28	28	≥28	0.50±0.15	≤15.5	1.00±0.15	0.8/1.0/1.6
	Stura-P-30	30	≥30	0.60±0.15	≤17.5	1.20±0.15	0.8/1.0/1.6
	Stura-P-35	35	≥35	0.60±0.15	≤20.0	1.20±0.15	0.8/1.0/1.6
	Stura-P-40	40	≥40	0.60±0.15	≤23.0	1.20±0.15	0.8/1.0/1.6
	Stura-P-45	45	≥45	0.65±0.15	≤25.0	1.25±0.15	0.8/1.0/1.6
	Stura-P-50	50	≥50	0.65±0.15	≤28.0	1.25±0.15	0.8/1.0

接受特殊尺寸及颜色定制需求，技术参数如有变更，恕不另行通知。最低订购量 (MOQ) 可能与包装数量有所不同。
Custom sizes and colors are available upon request. Technical specifications are subject to change without prior notice. Minimum order quantities (MOQ) may differ from standard packaging quantities.

https://www.hzdingyuan.cn/