

Wrapta

Military Grade Dual-Wall Heat Shrink Tubing
军标级双壁热缩管

军标级密封防护, 防水防腐
Military Grade Sealing, Waterproof & Anti-Corrosion

军标级双壁热缩管 (Wrapta-MG) 具备3:1收缩比与V-0级阻燃性能, 专为线束、船用电缆及金属管道等环境下的密封、防水与防腐保护而设计。其卓越的绝缘性及高机械强度, 保障在严苛工况下的长期安全运行, 是高要求工程和军工领域的理想选择。

Wrapta-MG military-grade dual-wall heat shrink tubing features a 3:1 shrink ratio and V-0 flame retardancy, offering reliable sealing, waterproofing, and corrosion protection for wire harnesses, marine cables, and metal pipes. With outstanding insulation and mechanical strength, Wrapta-MG ensures long-term safety and performance in demanding environments, making it the preferred solution for high-reliability applications and military projects.



产品特性与优势

Features and benefits

性能 Property	指标要求 Requirement	测试方法 Test Method	典型值 Typical Data
操作温度范围 Operating Temperature	/	/	-45°C to +135°C
最低收缩温度 Min. Shrink Temperature	/	/	+90°C
完全收缩温度 Full recovery temperature	/	/	+125 °C
抗张强度 Tensile strength	≥10.4MPa	ASTM D 2671	≥10.4MPa
老化后抗张强度 Tensile strength after aging	≥7.3MPa	ASTM D 2671 (158°C, 168 hrs)	≥7.3MPa
断裂伸长率 Elongation at break	≥300%	ASTM D 2671	≥300%
老化后断裂伸长率 Elongation at break after aging	≥100%	ASTM D 2671 (158°C, 168 hrs)	≥100%
纵向收缩率 Longitudinal Shrink Ratio	-8%~+8%	ASTM D 2671	-8%~+8%
阻燃性能 Flammability	60秒内自熄 Self-Extinguishing within 60s	AMS-DTL-23053/4	通过 Pass
击穿强度 Dielectric strength	≥15kV/mm	IEC 60243	≥15kV/mm
体积电阻率 Volume resistivity	≥10 ¹⁴ Ω·cm	IEC 60093	≥10 ¹⁴ Ω·cm
阻燃性 (垂直燃烧) Flame Retardancy (Vertical Burn)	V-0	GB/T 2408	V-0
阻燃性 (水平燃烧) Flame Retardancy (Horizontal Burn)	HB	GB/T 2408	HB
热熔胶性能 Adhesive Property			
吸水率 Water Absorption	< 0.2%	ASTM-D570	< 0.2%
软化点 Vicat Softening Point	95°C±5	ASTM-E28	95°C±5
剥离强度(PE) Peel Strength (PE)	120N/25mm	ASTM-D1000	120N/25mm
剥离强度(AL) Peel Strength (AL)	80N/25mm	ASTM-D1000	80N/25mm


- 收缩比3:1
 - 军标级、环保V-0阻燃
 - 优异密封防水, 防潮、防腐蚀, 胶层牢固
 - 高强度、高伸长率、耐热老化, 优良绝缘
 - 适用于线束、船用电缆和金属管等领域
-
- Shrink ratio 3:1
 - Military grade, V-0 flame retardant
 - Excellent waterproof, moisture and corrosion resistance, strong adhesive layer
 - High strength and elongation, heat aging resistant, excellent insulation
 - Suitable for wire harnesses, marine cables, and metal pipes

颜色 COLOR

符合标准 Standards

- RoHS

Wrapta Military Grade Dual-Wall Heat Shrink Tubing 军标级双壁热缩管

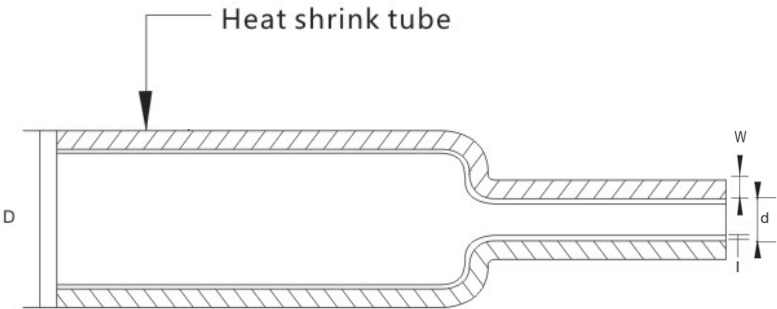

标准壁厚 Standard wall thickness							
收缩比 Shrink Ratio	编号 Part No.	规格 Size (Φ mm)	收缩前 As supplied (mm)	收缩后 After recovered(mm)			标准长度 Standard length (m/roll, m/pc)
			最小内径 I.D.min (D)	最大内径 I.D.max (d)	总壁厚 W.T (w+l)	胶厚 Adhesive thickness (l)	
3:1	Wrapta-WG-3.2	3.2	3.2	1.0	0.90±0.30	0.40±0.20	200/-
	Wrapta-WG-4.8	4.8	4.8	1.6	1.05±0.30	0.40±0.20	100/-
	Wrapta-WG-6.4	6.4	6.4	2.2	1.25±0.30	0.45±0.20	100/-
	Wrapta-WG-7.9	7.9	7.9	2.7	1.35±0.30	0.45±0.20	100/-
	Wrapta-WG-9.5	9.5	9.5	3.2	1.45±0.30	0.50±0.20	50/1.22
	Wrapta-WG-12.7	12.7	12.7	4.2	1.65±0.30	0.50±0.20	-/1.22
	Wrapta-WG-15.0	15.0	15.0	5.2	1.80±0.30	0.55±0.30	-/1.22
	Wrapta-WG-19.1	19.1	19.1	6.3	1.95±0.30	0.60±0.30	-/1.22
	Wrapta-WG-25.4	25.4	25.4	8.5	2.00±0.40	0.60±0.30	-/1.22
	Wrapta-WG-30.0	30.0	30.0	10.2	2.15±0.40	0.65±0.30	-/1.22
	Wrapta-WG-39.0	39.0	39.0	13.5	2.45±0.40	0.75±0.30	-/1.22
	Wrapta-WG-50.0	50.0	50.0	17.0	2.75±0.40	0.80±0.30	-/1.22

接受特殊尺寸及颜色定制需求，技术参数如有变更，恕不另行通知。最低订购量 (MOQ) 可能与包装数量有所不同。
Custom sizes and colors are available upon request. Technical specifications are subject to change without prior notice. Minimum order quantities (MOQ) may differ from standard packaging quantities.

https://www.hzdingyuan.cn/