


Pvcronix Flexible PVC Heat Shrink Tubing for Wire Terminals
软质PVC电线末端用热缩管

软质聚氯乙烯护套管，适用于电线绝缘与束线整理
Flexible PVC Tubing for Wire Insulation & Bundling

该产品采用高柔性聚氯乙烯材料制成，具备2:1优质收缩比，兼具卓越的耐化学性、耐腐蚀性和抗紫外老化性能，长期使用不易变色。专为线束保护和端子绝缘设计，安装便捷，有效提升线缆系统安全性和耐用性，广泛适用于多种环境。

Made from highly flexible PVC, this product offers a reliable 2:1 shrink ratio and excellent resistance to chemicals, corrosion, and UV aging for long-lasting color stability. Engineered for easy installation and optimal protection of wire terminals and bundles, it boosts safety and durability in various applications.

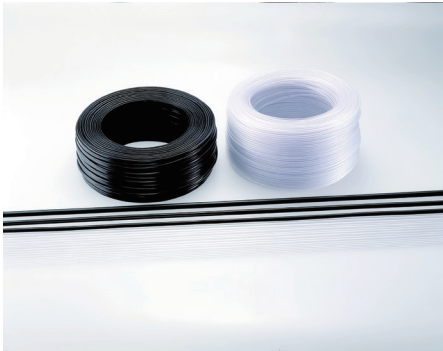


产品特性与优势 Features and benefits

性能 Property	测试方法 Test Method	典型值 Typical Data
纵向收缩率 Longitudinal shrinkage	ASTM D 2671	≤30%
径向收缩率 Radial direction	ASTM D 2671	≤50%
抗张强度 Tensile strength	ASTM D 638	≥24MPa
击穿强度 Dielectric Strength	ASTM D 149	> 10 KV/mm (W.T=0.2mm) > 12 KV/mm (W.T=0.25mm)
体积电阻率 Volume resistivity	ASTM D 257	≥10 ¹² Ω·cm
抗撕拉强度 Tear strength	/	≥539N/cma

- 收缩比为2:1
- 柔韧性 with 持久性俱佳
- 具备卓越的耐化学腐蚀性能
- 抗紫外线与耐候性强，长时间日晒不褪色
- 专为电线端子绝缘与线束整理精心设计
- Shrink ratio: 2:1
- Excellent flexibility and durability
- Superior chemical and corrosion resistance
- UV and weather resistance; non-discoloring under sunlight
- Specially designed for wire terminal insulation and bundling

颜色 COLOR

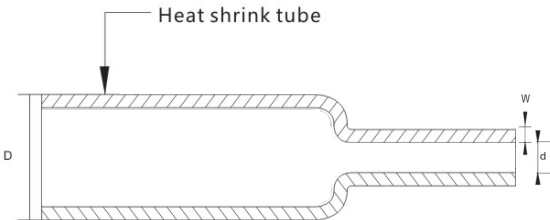

编号 Part No.	规格 Size (Φ mm)	收缩前 As supplied (mm)		收缩后 After recovered (mm)		标准长度 Standard length (m/roll)
		最小内径 I.D.min (D)	壁厚 W.T (W)	最大内径 I.D.max (d)	最小壁厚 W.T min (w)	
Pvcronix-FT-2.0	2.0 (0.08")	2.0	0.25	1.0	0.56	200
Pvcronix-FT-2.5	2.5 (0.10")	2.5	0.25	1.25	0.56	200
Pvcronix-FT-3.0	3.0 (0.12")	3.0	0.25	1.5	0.56	100
Pvcronix-FT-4.0	4.0 (0.16")	4.0	0.25	2.0	0.56	100
Pvcronix-FT-5.0	5.0 (0.20")	5.0	0.25	2.5	0.56	100
Pvcronix-FT-6.0	6.0 (0.24")	6.0	0.25	3.0	0.56	100
Pvcronix-FT-8.0	8.0 (0.31")	8.0	0.25	4.0	0.56	50
Pvcronix-FT-10.0	10.0 (0.39")	10.0	0.25	5.0	0.56	50

注意 Remarks:

1. 接受特殊尺寸及颜色定制需求，技术参数如有变更，恕不另行通知。最低订购量 (MOQ) 可能与包装数量有所不同。
Custom sizes and colors are available upon request. Technical specifications are subject to change without prior notice. Minimum order quantities (MOQ) may differ from standard packaging quantities.

2. 请将该产品存放于温度低于20°C的阴凉避光处，如冷藏库或冰箱，避免在阳光直射、热源附近或高温房间中存放，以防因高温导致收缩。
Store this product in a cool, dark place below 20°C, such as a cold storage room or refrigerator, and avoid exposure to direct sunlight, heat sources, or heated rooms to prevent shrinkage.

https://www.hzdingyuan.cn/